


DATASHEET

2X-A-LB

Addressable fire panel accessory

MAIN FEATURES

- Addressable fire panel accessory
- loop expansion board
- 2 loop

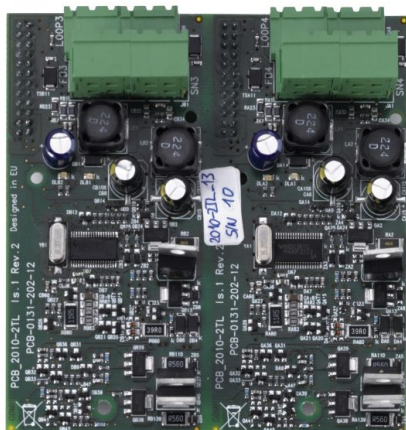

TECHNICAL SPECIFICATIONS

Inputs / outputs

Maximum loop capacity	2
Maximum zone capacity	up to 256
Output type and rating	Loops: 2, 250 mA / 29 VDC (29 to 36 VDC)

Physical characteristics

Physical dimensions	127 x 55 x 152 mm (W x H x D)
Net weight	120 g
Shipping weight	192 g
Mounting type	Surface mount

Environmental characteristics

Operating temperature	-8 to +42°C
Storage temperature	-10 to +50°C
Relative humidity	max. 95% noncondensing

Other characteristics

Maximum system capacity (device count)	up to 256
Type and rating	Recommended 2 core 1.5 mm ² twisted pair
Length	56 ohm / 1 µF max. 2 km
Programmable	4, 700 mA / 19.5 to 28 VDC (24 VDC nominal), supervised
Termination	15 kohm
Form factor	Large

2X-A-LB

TECHNICAL SPECIFICATIONS

Compliance
Certification

CPD, RoHS, WEEE
EN54-13, EN54-2, EN54-21, EN54-4