


ATS1810

Relay board

MAIN FEATURES

- Relay board
- 4-way

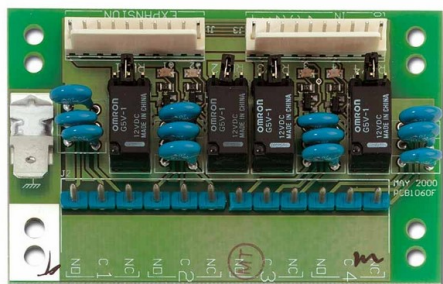

TECHNICAL SPECIFICATIONS

Power supply

Operating voltage	10.5 to 13.8 VDC
Current consumption	100 mA max.

Inputs / outputs

Type of outputs	Relays
Relays	SPDT

Physical characteristics

Physical dimensions	80 mm x 52 mm (W x H)
---------------------	-----------------------

Environmental characteristics

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing
Environment	EN50130-5

Other characteristics

Expander type	Output expander
Product line	Advisor Advanced, ATS Master, Axon
Connection type	Plug-in
Compatibility	Axon, Advisor Advanced, ATS Master, ATS120xE and ATS121xE expanders
Max. distance from panel	Located in Panel or DGP/Expander housing
Max. per panel	Depending on panel/expander

ATS1810

TECHNICAL SPECIFICATIONS

Total	4
Onboard	4
Compliance	CE
Certification	CE