


DATASHEET

CR255

Electronic delay control for double-leaf fire doors

MAIN FEATURES

- Electronic delay control for double-leaf fire doors

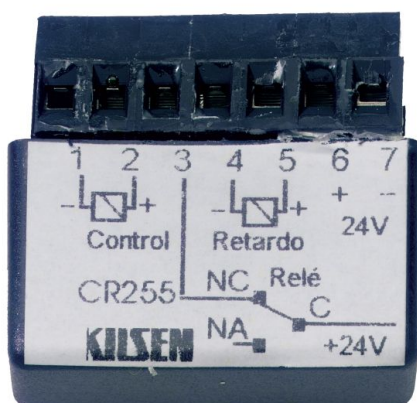

TECHNICAL SPECIFICATIONS

Power supply

Operating voltage	20 to 27 VDC
Max. current requirements	0.5 A

Physical characteristics

Physical dimensions	40 x 35 x 12 mm
Net weight	24 g
Colour	Black

Environmental characteristics

Operating temperature	-10 to 60°C
Storage temperature	-20 to 70°C
Relative humidity	0 to 95% noncondensing

Other characteristics

Delay time	5 s
Vandal proof	No
Compliance	CE, REACH, RoHS 2