


DATASHEET

IM1640PAG-G3

Surface Mount Contact

MAIN FEATURES

- Surface Mount Contact
- Armored Cable
- EN Grade 3 & NFA2P 3 shields

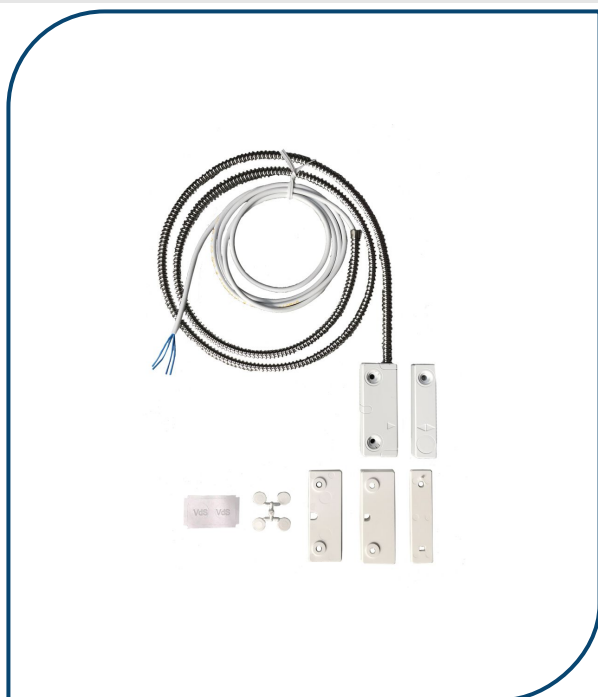

TECHNICAL SPECIFICATIONS

Power supply

Voltage	max. 40 VDC
Switching current	max. 500 mA

Inputs / outputs

Contact type	NC
Wired-wireless	Wired
Dimensions contact / sensor	8 x 30 mm

Physical characteristics

Physical dimensions	58 x 22 x 12 mm (W x H x D)
Dimensions magnet	8 x 30 mm
Colour	White
Material	ABS

Environmental characteristics

Operating gap	15 mm
Operating temperature	-40° to +70° C
IP rating	IP67

Other characteristics

Application type	Surface mount
Connectivity	4 wires, 2 meters (armored cable)
Cable length	2 m

IM1640PAG-G3

TECHNICAL SPECIFICATIONS

EN50131 grade
Compliance
Certification

Grade 3
CE
NFA2P