


DATASHEET

KE-IO3101-M

Excellence series intelligent addressable mains switching output unit with isolator

MAIN FEATURES

- Excellence series intelligent addressable mains switching output unit with isolator

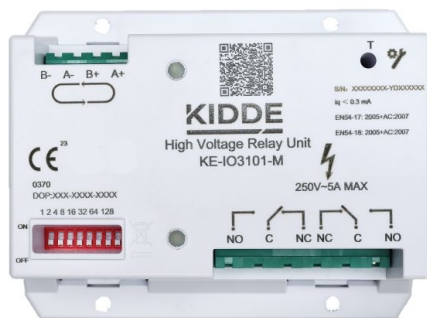

TECHNICAL SPECIFICATIONS

Power supply

Power supply type	Loop powered
Operating voltage	17 to 29 VDC
Current consumption	300 μ A @ 24 VDC (quiescent) 2.5 mA @ 24 VDC (active)
Communication voltage	4 to 11 V (pulsed)
Loop current	2.5 mA (active)
Switch current	1.05 A (continuous) / 1.4 A (short)
Leakage current	<1 mA
Isolation voltage	14 to 15.5 VDC
Reconnect voltage	14 to 15.5 VDC

Inputs / outputs

Output quantity	1 x Dual
Output type and rating	Double pole, change over - 1 A @ 60 VDC / 5 A @ 250 VAC (resistive load)
Quantity per loop	128

Physical characteristics

Physical dimensions	109 × 88 × 40 mm (W x H x D)
Net weight	220 g
Colour	Signal white (RAL 9003)
Mounting type	DIN-rail, Surface mount, Wall mount
Material	PC / ABS

KE-IO3101-M

TECHNICAL SPECIFICATIONS

Environmental characteristics

Operating temperature	-22 to +55°C
Storage temperature	-30 to +65°C
Relative humidity	10 to 93% noncondensing
Environment	Indoor
IP rating	IP30

Other characteristics

Status indication	Tri-coloured LEDs
Compatibility	Kidde Commercial Excellence Systems
Addressing method	DIP Switches
Address range	1 to 128
Cable specification	0.13 to 3.31 mm ² (12 to 26 AWG) shielded/unshielded twisted-pair
Type	Negative line break
Series resistance	<0.08 Ω
Impedance requirements	≤ 32 devices between isolators
Vandal proof	No
Compliance	CE, REACH, RoHS 3, WEEE
Certification	CPR
Standards	EN54-17, EN54-18
Category	Reference
Enclosures	N-IO-MBX-1
Interface unit	N-IO-SBX-2G